

3D BEND SERIES



WK1010-3D-CV24-Wxx

- ▶ Silicon neon flex WK1010-3D, Horizontal and Vertical bending;
- ▶ IP67 Rate, UV resistant, saltwater resistant and high temperature resistant;
- ▶ Front/Side/Bottom Cable Entry optional;
- ▶ Does not interfere by Video/Audio systems nearby;
- ▶ Constant current: max 15meters one end feed, without voltage drop.


- 1800K
- 2200K
- 2400K
- 2700K
- 3000K
- 3500K
- 4000K
- 4500K
- 5000K
- 5700K
- 6000K
- 6500K
- Red
- Green
- Blue



Basic Parameters

Product:	WK 1010-3D Silicone Linear Neon
Material:	100% food-grade silicon
Size:	10*10mm (0.39"*0.39")
LED QTY/m:	120
Light emission:	120°
IP Rate:	IP67 with appropriately rated accessories
Warranty:	3years
Power Feed:	One/ Two end feed
Cable Out:	Front/ Side/ Bottom
Humidity:	0-95% non condensing

Dimension

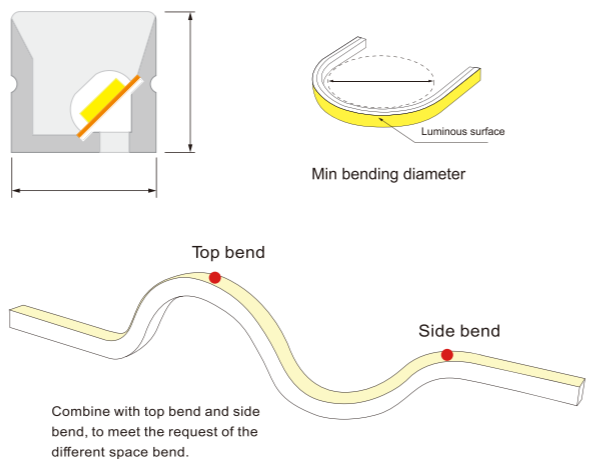


Basic Parameters


Model	Voltage	Power	CRI (Ra)	CCT	Lumens(lm/M)	Efficacy (LM/w)	Max. length 5W (M)	Lumens(lm/M)	Efficacy (LM/w)	Max. length 10W(M)	Unit cut (mm)
WK1010-3D - CV24-Wxx	CV/CC24V	5/10W	>90	2700±100	232	46.4	5M	464	46.4	5M	35.7
				3000±100	243	48.6	5M	486	48.6	5M	
				3500±200	246	49.1	5M	491	49.1	5M	
				4000±300	253	50.6	5M	506	50.6	5M	
				5000±300	253	50.6	5M	506	50.6	5M	
				6000±300	247	49.3	5M	493	49.3	5M	
				Red	84	16.8	5M	168	16.8	5M	35.7
				Green	22.5	44.5	5M	445	44.5	5M	
				Blue	47.5	9.5	5M	95	9.5	5M	
				Yellow	55	11	5M	110	11	5M	
				Orange	73.5	14.7	5M	147	14.7	5M	
				Pink	185.5	37.1	5M	371	37.1	5M	

Dimension structure

1000mm(MAX 5000mm)

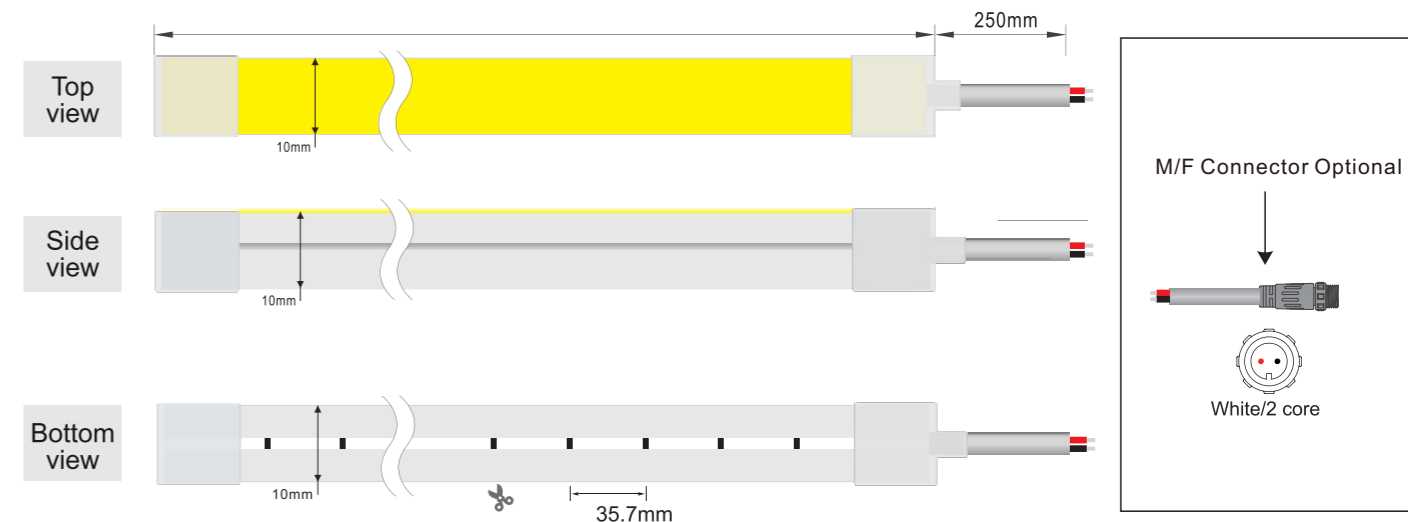

Front Cable Entry Side Cable Entry Bottom Cable Entry End cap

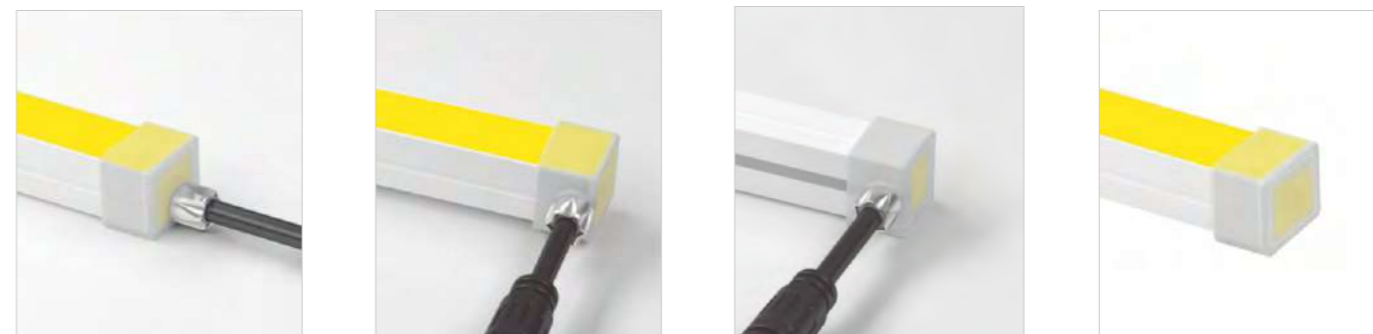

C1

C2

C3

C4

Accessories

