




WK-2412-PRO-TV

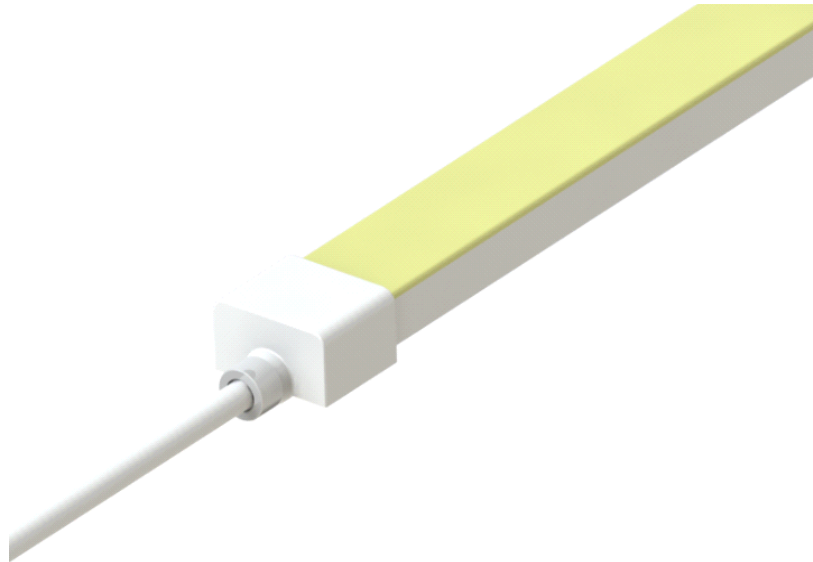

PV2412B



PV2412T



Features:

- Top lighting and top bending
- Lumileds LED optional
- Dual-color silicone extrusion
- UV and yellowish resistant
- IP67 and salt-mist proof
- L70B50 > 50,000hrs
- Easy installation and re-connect accessories
- 2000lm per meter @4000K
- 24W/mtr, continuous length 10mtrs
- Bending radius 12cm

Benefits:

- ✓ Better protection to PCB and LED, thanks to double protection circuit design and extra-strong PCB structure
- ✓ Higher efficiency thanks to extra-white reflector
- ✓ Continue length 10m base on constant current circuit inside.

Application:

- Building and sign outline lighting
- Decoration lighting
- Powerful indirect lighting



WK-2412-PRO-TV product configurations

Item	Input Voltage	Driving mode	Power/m	Lm/m	Available Color	Max. length (Single-end power feeding)	Cutting unit	LED Qty/m
2412B-CC	DC24V	Constant Current	24W	2000lm @4000K	2700K/3000K/4000K/5000K/6500K/Red/Green/Blue	10mtrs	100mm	240LEDs/m
2412T-CC	DC24V	Constant Current	24W	1550lm @4000K	2700K/3000K/4000K/5000K/6500K/Red/Green/Blue	10mtrs	100mm	240LEDs/m




WK-2412-PRO-TV Accessories



◆ For installation:

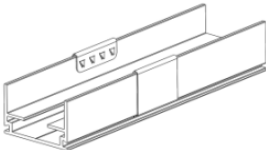



AL profile in 5cm or 1mtr/pcs



PC Clips

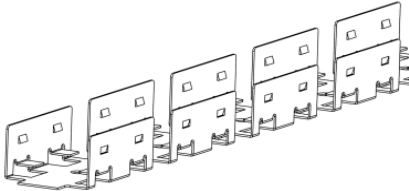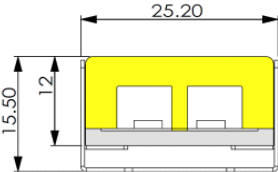


Top bending Flexible Stainless installation chain
1mtr/pcs

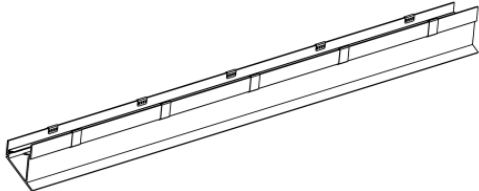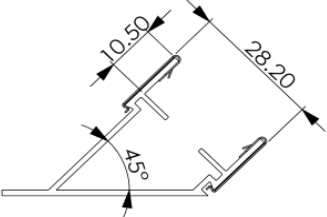

45-AL L-profile, 5cm or 1mtr/pcs

WK-2412-PRO-TV Accessories

- ◆ For Connection type 1 – IP67 Molded power feeder

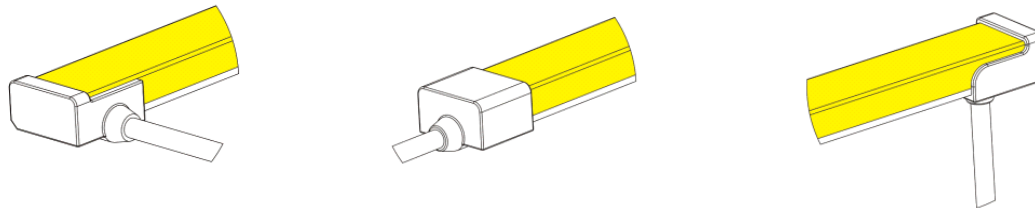

- ◆ For Connection type 2 – IP67 Quick-install power feeder

