



Halolite Recessed Anti Glare Series

Halolite Anti Glare recessed downlights with 25mm black baffle to avoid glare

Featuring Bridgelux COB LED for outstanding performance, most accurate binning and high CRI >90




Also available in Tunable White 2000-3000K with Bridgelux or Honourtek Chips

Unique slim design fixtures adjustable and fixed

Available in White, Black, Nickel, Bronze, Copper and Gold
Brushed or Mirror polished

Even custom colours are possible upon request

Adjustable, Fixed and IP54

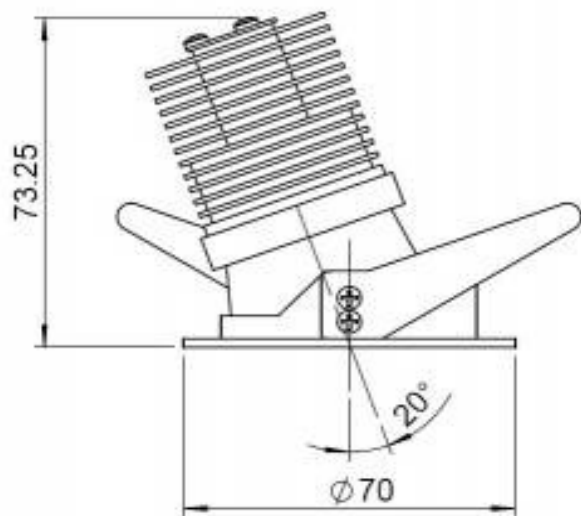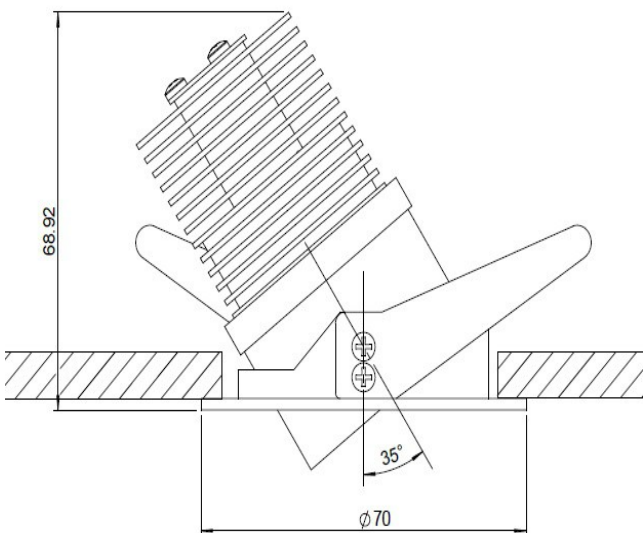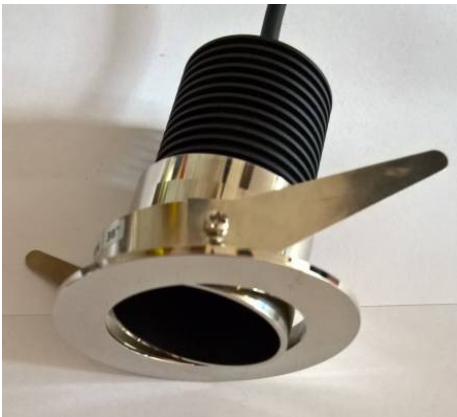

Halo-AG-8W

Technical Parameters:

Light source: Bridgelux COB Led

Input Voltage: 18VDC

Power consumption: 8W

Rated current: 350mA

CCT: 2700K / 3000K

Lumen: 550 (2700K)

Rated life: 50,000 hours

Beam angle: 10°, 24°, 36°

Operating temperature: -20°C~40°C

Storage temperature: -30°C~60°C

Color rendering index: >95

Certificate: CE/RoHS

Dimmability: Yes

Cut out: 60mm

Outer diameter: 70mm

Height incl.fixture: 73mm

IP Rate: 54

Available dimming drivers:

0-10V

Triac

Dali