


Part No.	Description	Picture
1.05.005.0001 (1m) 1.05.005.0002 (2m) 1.05.005.0003 (3m)	PMMA one time extrusion profile 1m,2m,3m length, Customized length is available on request.	
1.02.04.0018 (with hole) 1.02.04.0019 (w/o hole)	End cap Frosted color	

Part No.	Description	Picture
1.02.07.0003	Mounting clip White color	
1.01.07.0001	Stainless steel mounting clip	
1.01.07.0008	Stainless steel mounting clip	

IP67 LED profile
suit for indoor or outdoor light decoration
linear light design , homogeneous and dots free
Installation: recessed or surface mounting
Cable output: from bottom or the end

IP rating: IP67 / IP68
Maximum 15W/m
UV resistance
Maximum stand weight: 16.4kN

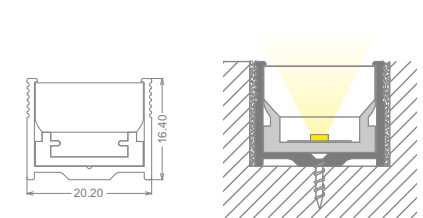

Part No.	Description	Picture
1.05.005.0014 (1m) 1.05.005.0015 (2m) 1.05.005.0016 (3m)	Aluminum profile, 6063 aluminum material anodized or powder coating finished 1m,2m,3m length, Customized length is available on request. 6063	
1.05.005.0001 (1m) 1.05.005.0002 (2m) 1.05.005.0003 (3m)	PMMA one time extrusion profile 1m,2m,3m length, Customized length is available on request.	



Part No.	Description	Picture
1.02.04.0018 (with hole) 1.02.04.0019 (w/o hole)	Frosted end cap	

IP67 LED profile
suit for indoor or outdoor light decoration
linear light design , homogeneous and dots free
Installation: recessed or surface mounting
Cable output: from the bottom or end

IP rating: IP67 / IP68
Maximum 15W/m
UV resistance
Maximum stand weight: 24.2kN


FLAP 17 AL2

IP67 LED Profile

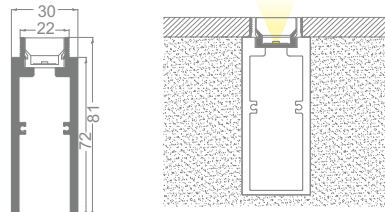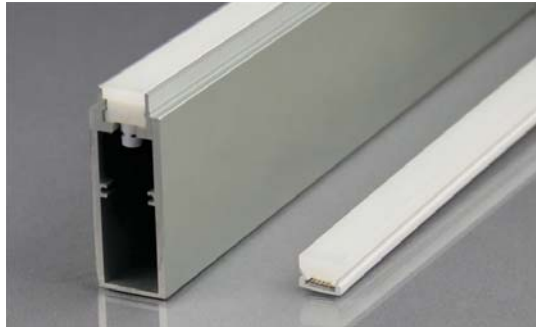

Part No.	Description	Picture
----------	-------------	---------

1.05.005.0021 (1m)
1.05.005.0023 (2m)
Aluminum profile, 6063 aluminum material anodized or powder coating finished 1m,2m,3m length, Customized length is available on request.



1.01.04.0015 (with hole)
1.01.04.0016 (w/o hole)

Aluminum end cap



1.05.005.0001 (1m)
1.05.005.0002 (2m)
1.05.005.0003 (3m)
PMMA one time extrusion profile 1m,2m,3m length, Customized length is available on request.




IP67 LED profile
suit for indoor or outdoor light decoration
linear light design , homogeneous and dots free
Installation: recessed
Cable output: from the bottom or end

IP rating: IP67 / IP68
Maximum 15W/m
UV resistant
Maximum stand weight: >30kN




FLAP 17 AL3

IP67 LED Profile

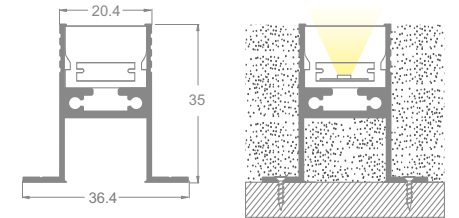

Part No.	Description	Picture
----------	-------------	---------

1.05.005.0201 (1m)
1.05.005.0202 (2m)
1.05.005.0203 (3m)
Aluminum profile, 6063 aluminum material anodized or powder coating finished 1m,2m,3m length, Customized length is available on request.



1.02.04.0018 (with hole)
1.02.04.0019 (w/o hole)


End cap Frosted color



1.05.005.0001 (1m)
1.05.005.0002 (2m)
1.05.005.0003 (3m)
PMMA one time extrusion profile 1m,2m,3m length, Customized length is available on request.




Ip67 LED profile
suit for indoor or outdoor light decoration
linear light design , homogeneous and dots free
Installation: recessed
Cable output: from the bottom or end
IP rating: IP67 / IP68
Maximum 15W/m
UV resistance
Maximum stand weight: 16.4kN

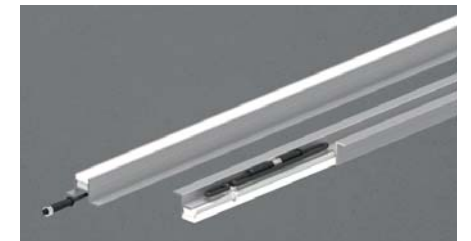



FLAP 22

IP67 LED Profile

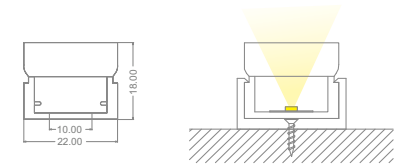

Part No.	Description	Picture	Part No.	Description	Picture
1.05.015.0004 (1m) 1.05.015.0005 (2m)	PMMA one time extrusion profile 1m, 2m and 3m lengths. Customized length is available on request.		1.02.07.0007	White color plastic mounting clip	
1.02.04.0026 (with hole) 1.02.04.0027 (w/o hole)	Frosted end cap				


Ip67 LED profile
suit for indoor or outdoor light decoration
linear light design , homogeneous and dots free
Installation: recessed or surface mounting
Cable output: from the bottom or end

IP rating: IP67 / IP68
Maximum 20W/m
UV resistance
Maximum stand weight: 24.2kN



FLAP 22 AL1

IP67 LED Profile

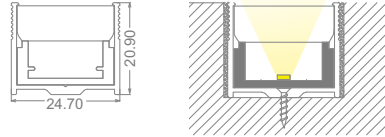

Part No.	Description	Picture
----------	-------------	---------

- 1.05.015.0014 (1m)
 - 1.05.015.0015 (2m)
 - 1.05.015.0016 (3m)
- Aluminum profile, 6063 aluminum material anodized or powder coating finished 1m,2m,3m length. Customized length is available on request.



- 1.02.04.0026 (with hole)
- 1.02.04.0027 (w/o hole)

Frosted end cap



- 1.05.005.0001 (1m)
- 1.05.005.0002 (2m)
- 1.05.005.0003 (3m)

PMMA one time extrusion profile 1m, 2m and 3m lengths. Customized length is available on request.




Ip67 LED profile
suit for indoor or outdoor light decoration
linear light design , homogeneous and dots free
Installation: recessed or surface mounting
Cable output: from the bottom or end

IP rating: IP67 / IP68
Maximum 20W/m
UV resistance
Maximum stand weight: 24.2kN



FLAP 22 AL2

IP67 LED Profile

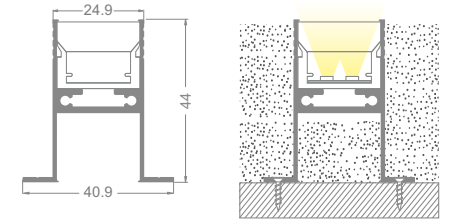

Part No.	Description	Picture
----------	-------------	---------

- 1.05.015.0051 (1m)
 - 1.05.015.0052 (2m)
 - 1.05.015.0053 (3m)
- Aluminum profile, 6063 aluminum material anodized or powder coating finished 1m,2m,3m length. Customized length is available on request.



- 1.02.04.0026 (with hole)
- 1.02.04.0027 (w/o hole)

Frosted end cap



- 1.05.005.0001 (1m)
- 1.05.005.0002 (2m)


PMMA one time extrusion profile 1m, 2m and 3m lengths. Customized length is available on request.



Ip67 LED profile
suit for indoor or outdoor light decoration
linear light design , homogeneous and dots free
Installation: recessed or surface mounting
Cable output: from the bottom or end


IP rating: IP67 / IP68
Maximum 20W/m
UV resistant
Maximum stand weight: 24.2kN



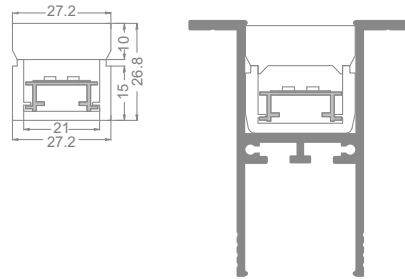


Part No.	Description	Picture
----------	-------------	---------

- 1.05.005.0061 (1m)
 - 1.05.005.0062 (2m)
 - 1.05.005.0063 (3m)
- PMMA one time extrusion profile, maximum can be 3meter length. Customized length is available on request.




Ip67 LED profile
 suit for indoor or outdoor light decoration
 linear light design , homogeneous and dots free
 Installation: recessed or surface mounting
 Cable output: from the bottom or end

IP rating: IP67 / IP68
 Maximum 25W/m
 UV resistance
 Maximum stand weight: 30kN

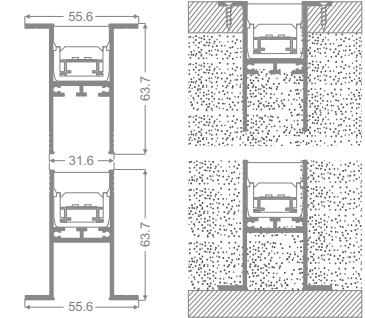

Part No.	Description	Picture
----------	-------------	---------


- 1.05.005.0181 (1m)
 - 1.05.005.0182 (2m)
 - 1.05.005.0183 (3m)
- Aluminum profile, 6063 aluminum material anodized or Powder coating finished 1m,2m,3m length, Customized length is available on request.



- 1.05.005.0061 (1m)
 - 1.05.005.0062 (2m)
 - 1.05.005.0063 (3m)
- PMMA one time extrusion profile, maximum can be 3meter length. Customized length is available on request.



- 1.05.005.0190 Aluminum plate



Ip67 LED profile
 suit for indoor or outdoor light decoration
 linear light design , homogeneous and dots free
 Installation: recessed or surface mounting
 Cable output: from the bottom or end

IP rating: IP67 / IP68
 Maximum 25W/m
 UV resistance
 Maximum stand weight: 30kN

