


MILKYFLEX 3014/7 IP68 U PRO



Color temperature	CRI	LM/Mtr	Wattage	LEDs/Mtr
2700K	90	550	7	144
3000K	90	570	7	144
4000K	90	590	7	144
6500K	90	625	7	144



Model NO: MF3014/7-S


CRI > 90

CRI95 is Optional

One Bin Only

DC24V | 3014 LED | PCB Width 8mm | Constant Voltage
Maximum Single Run Length = 5 meter W=10mm H=5mm PU IP68

DC24V | 3014 LED | PCB Width 8mm | Constant Current
Maximum Single Run Length = 17meter W=10mm H=5mm Silicone IP67

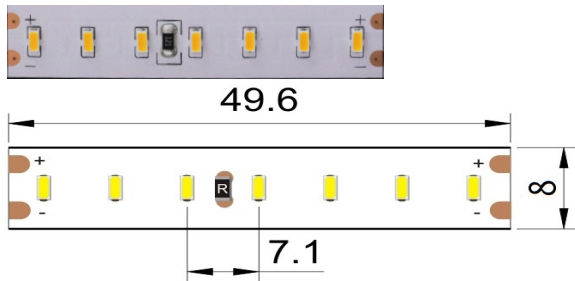

Optical Parameter:

Model no: MF-3014/7-S
 Input Voltage: 24VDC
 Power/M: 7W
 Lumen/M: 550
 IP Grade: IP68 (PU) IP67 (Silicone)
 CRI: 90
 CCT: 2700K
 Encapsulation: Milky PU or Silicone

Basic Parameter:

Led Qty/M: CV=140 CC=144
 SMD Type: 3014
 Lifetime: 50.000
 Warranty: 5 years
 Working Temperature: -20C +45C
 Min.Cut length: CV=49.6mm CC=41,6mm
 PCB Width: 8mm
 Size: W=10mm * H=5mm